


# PankaDisc

Technical specifications **NEW**



## Uncoated beer mat board

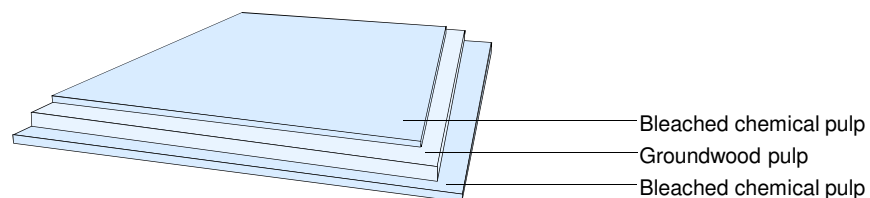

### Typical technical values for PankaDisc

Property / Unit	Tolerance						Standards
Grammage, g/m <sup>2</sup>	±4%	390	430	480	580	630	ISO 536
Thickness, µm	±5%	900	1000	1150	1400	1550	ISO 534
Surface Smoothness Bendtsen, ml/min		1600	1800	2000	2000	2000	ISO 8791-2

On request, PankaDisc is available in thicknesses from 800 µm to 1550 µm

### Properties not related to grammage

Property / Unit	Tolerance		Standards
Moisture, %	±1.5	8,0	ISO 287
ISO Brightness C/2°, %		75	ISO 2470
Scott Bond, J/m <sup>2</sup>		90	TAPPI 569
Absorbency, s, Top		30	
Absorbency, s, Reverse		30	

For more information contact your local sales representatives or

Pankaboard Oy  
 Ruukintie 2  
 FI-81750 Pankakoski  
 Finland  
 Tel. +358 (0) 10 480 600  
 Fax. +358 (0) 10 480 4701

Pankaboard Oy, Sales Office  
 Pohjoinen Makasiinikatu 4 (4th floor)  
 FI-00130 Helsinki  
 Finland  
 Tel. +358 (0) 10 480 600  
 Fax. +358 (0) 10 480 4702

[www.pankaboard.com](http://www.pankaboard.com)

All properties according to Pankaboard Mill measurements tested in manufacturing conditions.  
 Test climate 23°C / 50%RH (according to ISO 187). Tolerances based upon 95% confidence limits, apply to reel average.  
 In order to verify, reel average shall be based on 5 single measurements randomly sampled within the reel. These averages will be for at least 19 of 20 reels within the specification limits.

Issued: 02 / 2015  
 Cancels: 10 / 2013